



CE8000-ASF

QUICK TIP SHEET

GRAPHTEC
PRECISION CUTTING SOLUTIONS

A REFERENCE GUIDE to the Video Series

CE8000-ASF CUTTER OVERVIEW



150 Sheets*




450 gf Cutting Force
24" sec Cutting Speed

High-Capacity Loading:

150 sheet capacity* ideal for high-volume tasks.

*Depending on media thickness

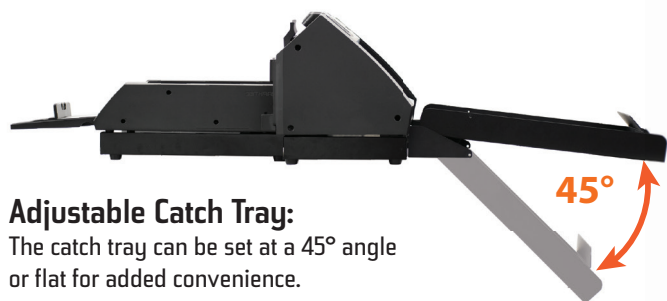

Adjustable Catch Tray:

The catch tray can be set at a 45° angle or flat for added convenience.

Loading Media:




11"x17" media



12"x18" media

Cut Margin Templates:

- ▶ Left 0.59" (15mm)
- ▶ Right 0.59" (15mm)
- ▶ Bottom 0.67" (17mm)
- ▶ Top 1.46" (37mm)

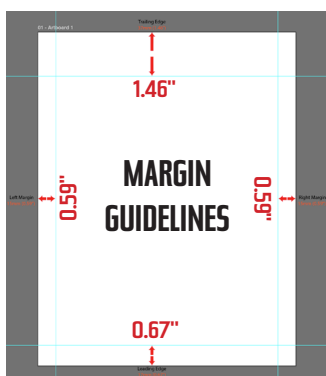

STANDARD ACCESSORIES

CB09UB



▶ For stickers and labels.

Diameter 0.98mm | Cutting Angle 45°

PHP33-CB09



0.9mm, blue top, black ABS tip.
▶ For stickers and labels.

Diameter 0.9mm

DESIGN SOFTWARE / PLUGIN INCLUDED



▶ Cutting Master 5 Plug-in:
Adobe Illustrator (PC/Mac) or CoreIDRAW (PC)



▶ Graphtec Studio 2:
Design Software (PC/Mac)

OPTIONAL ACCESSORIES

CB15U-K30



▶ Card stock, Synthetic vinyl and all thick media.

Diameter 0.98mm | Cutting Angle 45°

PHP35-CB15-HS



1.5mm, red top, black brass tip.
▶ Card stock, Synthetic vinyl and all thick media.

Diameter 1.5mm

PHP35-CB15-HS



- See magnified blade
- Easily adjust length
- Check quality of blade

LOUPE

LOADING BLADE HOLDERS





Blade preparation and mounting.

CE8000-ASF SPECIFICATIONS

GRAPHTEC
PRECISION CUTTING SOLUTIONS

UNIT

CE8000 - Auto Sheet Feeder

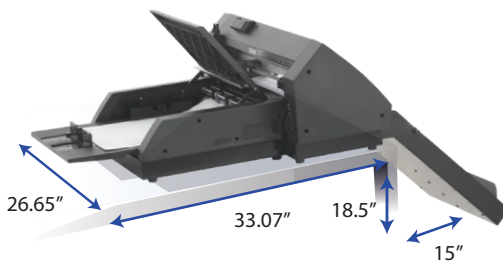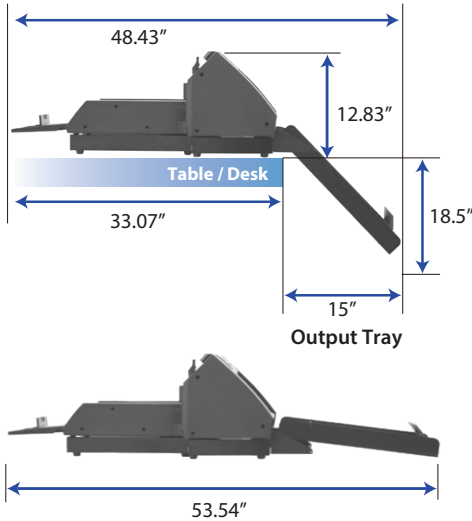

ITEM

DESCRIPTION

Supported Standard Sized Media	8.5" x 11" / 11" x 17" / 12" x 18" and 13" x 19" (Loaded in portrait orientation)
Capacity of Exit Tray	Up to 150 sheets or up to 1.125" height (Varies by the material, thickness and condition of media)
Power Source	From the CE8000
Operating Environment	Temperature: 50 to 86° F Humidity: 35 to 70 % RH (non-condensing)
Dimensions	Table Edge Mount: Tray at 45° angle 26.65" x 48.43" x 12.83" Desktop Flat Mount: 26.65" x 53.54" x 12.83" The CE8000-40 is placed on the edge of the table Refer to the illustration
Weight	Total: 54.67lbs Cutter: 24.25lbs Auto Feeder Unit: 15.87lbs Paper Output Tray: 13.23lbs
Conditions Settings	Dual Configuration - 2 User / 8 Separate Condition Settings
Supported Media	Up to 350 g/m ² (Grams of media that can be handled by the automatic feeder unit)
Programable Resolution	GP-GL TM mode: 0.1/0.05/0.025/0.01mm HP-GL *3:0.025mm
LCD Display	Touch Panel Screen (240-dot X 128-dot)
Barcode \ DataLink	YES
Compatible Standards	Main body : cNus(UL / cUL), CE mark, FCC AC adapter : UL, cUL, CE mark, FCC, PSE, CCC
Digital Cutting Software	Supported OS Mac OS 10.13 / Windows 10, 8.1, 7 Design Software Plug-ins Cutting Master 5 Plugin for Adobe Illustrator 24 / Mac & PC CorelDraw Studio 24 and above for PC only . Stand alone application Graphtec Studio 2 / Mac & PC
Cutting Specs	Cutting Speed Max. 24"/s (600mm/s) in all directions Acceleration Max. 21.2 m/s ² (2.2G) at 45° direction Cutting Force Max. 450 gf (4.41 N) with CE8000-40 Interface USB 2.0 • Ethernet 10BASE-T / 100BASE-TX • Wireless LAN* Power Source 100 to 240 V AC Power Consumption Up to 100W Compatible Standards UL, cUL, CE mark, RoHS Directive



www.graphtecamerica.com/videos

Graphtec Video Training is a comprehensive series of instructional videos that are key to understanding the capabilities of the **CE8000-ASF Auto Sheet Feeder**. **Advanced Features** and **Optional Accessories** are also demonstrated in depth, so you can be fully trained and ready to boost productivity by mastering all the capabilities of this versatile Sheet Feeder and Cutting Unit.

California Proposition 65 WARNING
WARNING: This product can expose you to chemicals including Tetrabromobisphenol A (TBBPA), which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov

*OPTIONAL ACCESSORY

rev 2-25

GRAPHTEC
PRECISION CUTTING SOLUTIONS

17462 Armstrong Ave, Irvine, CA 92614 • (949) 770-6010 • www.graphtecamerica.com